

BCMA Series

Common Mode Filters For Automotive Signal Line

Size 1210

FEATURES


-
- /2YŶ2yŶ2ŘŠ ůfters f2W {λEyl-f [λyŠ
-
- /2YŁJŁI-nt with AEC-Q200
- vdzI-yăŭëŶ onnnŁJă

APPLICATION

- interfI-ŎŠă ó a hSTŁ Ł { . HŁŁ Ł5 . πμοφπŁ etŎŰ

Dimensions: [mm]


Land Pattern: [mm]

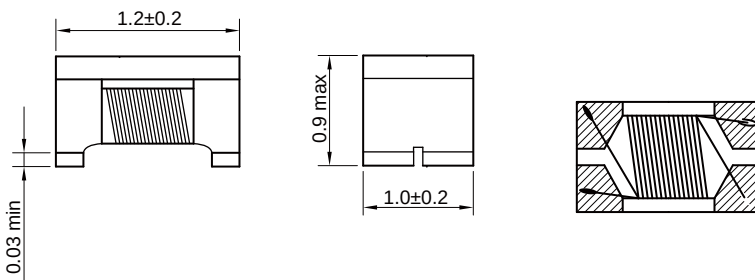

Electrical Properties:

Typical Electrical Characteristics:

Soldering Reflow:

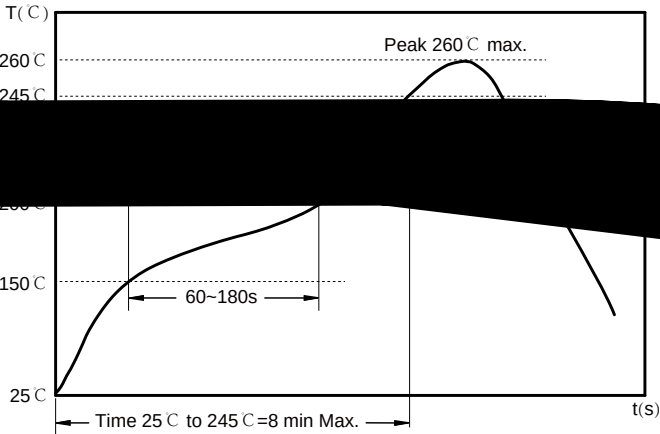

Preheat condition: 150 ~200 °C / 60~180 sec.

Max time at 260 °C: 10 sec

Max time at 260 °C: 10 sec
Allowed Reflow time: 3x max.


Packaging Information:

Tape Dimension:




Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
BCMA1210	1.12±0.1	1.40±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	1.05±0.1	1.75±0.1	0.22±0.05

Peel force of top cover tape:

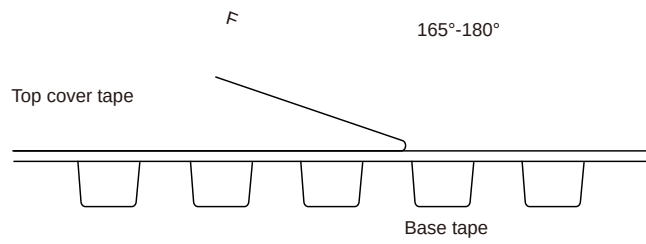

Reel Dimension: [mm]

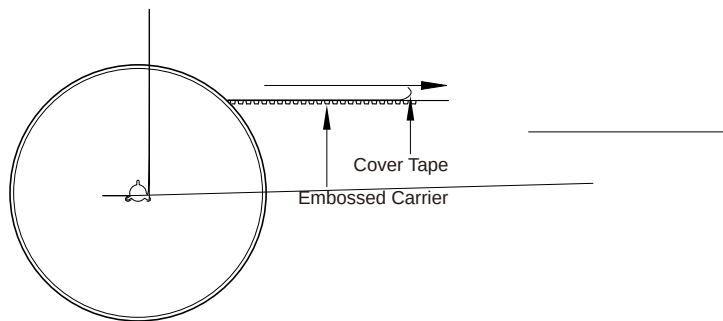

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

-
-
-
-