

BCMA Series

Common Mode Filters For Automotive Signal Line
Size 2012



FEATURES


-
- /ΩΨΨΩΩ ΨΩΣΣ ΩPters fΩo {Ω° Ω†P [ΩΩΣ
-
- !9/ v ξŸ†PΩΩΣΣ
- vŸ†ΩΓΩbl μΩσ

APPLICATION



- interfΩΣσ a hST, USB2.0, IDB-1394, etΩ

Dimensions: [mm]


Land Pattern: [mm]



Electrical Properties:




Typical Electrical Characteristics:

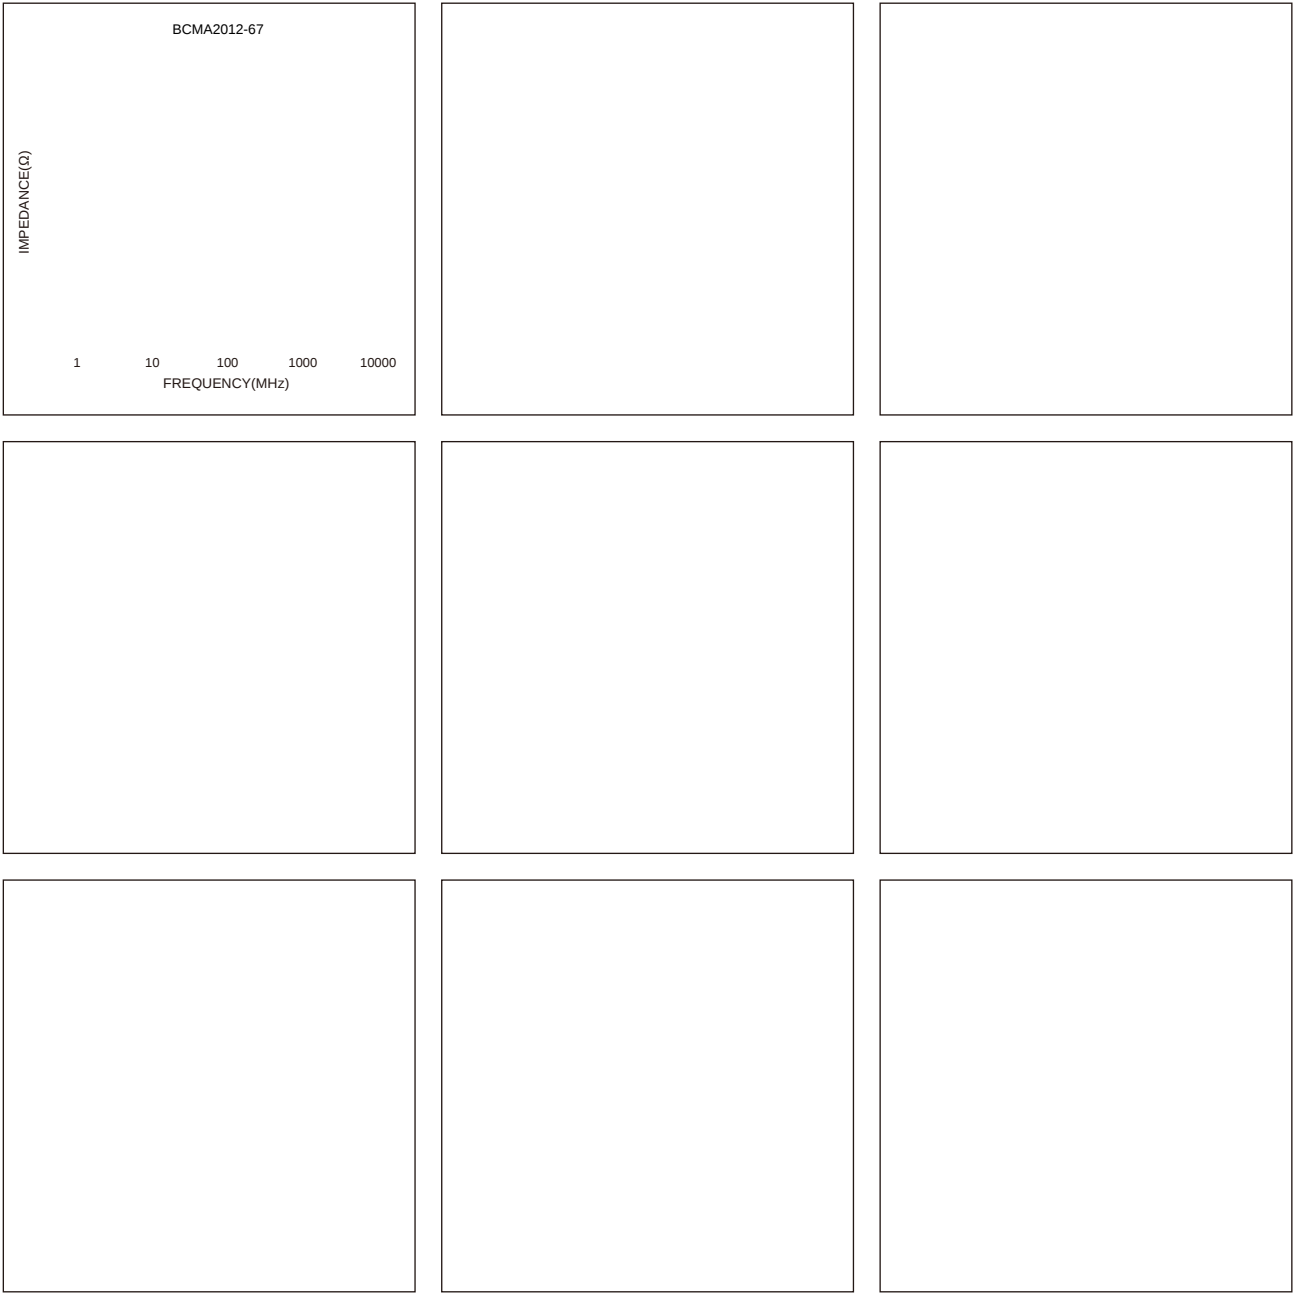




Peel force of top cover tape:

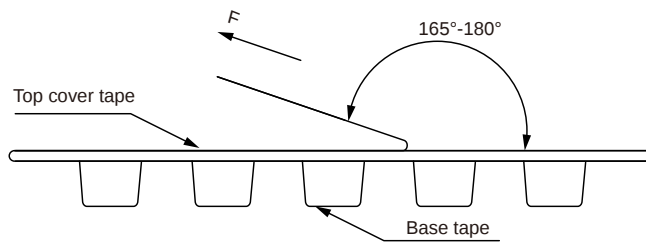


The peel force of top cover tape shall be between 0.14 to 0.78 N

Reel Dimension: [mm]

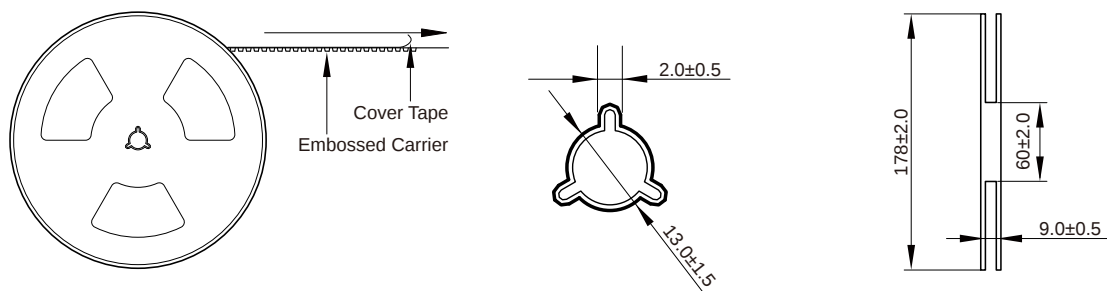

Packaging Quantity:

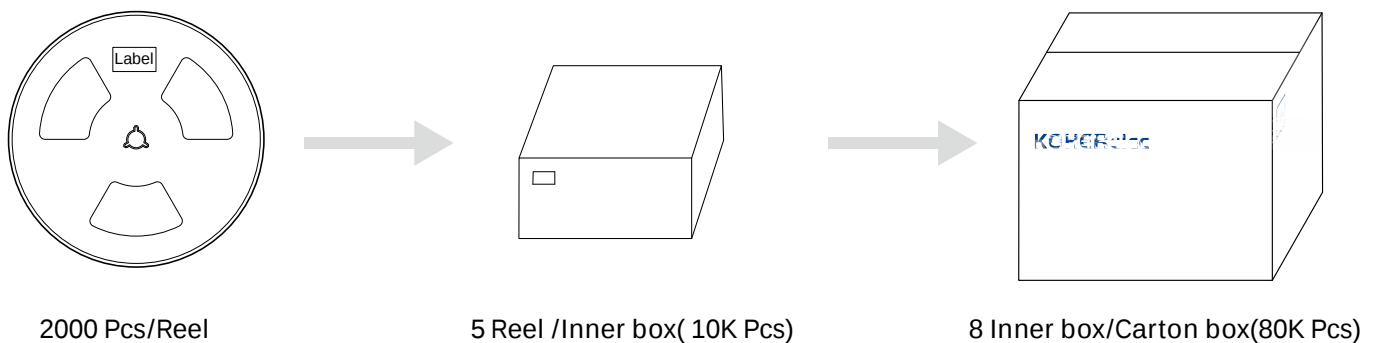

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
-
-