



11


11

Electrical Properties:

Part No.	L(μ H) $\pm$ 30%	I _R (A)	max (m Ω)	Vac	Vac	Core Material	Test Condition
CMC4724-501N	500	35	2.3	1500	250	锰锌 MnZn	10KHz/0.25V

Typical Electrical Characteristics:

Insertion Loss Common Mode

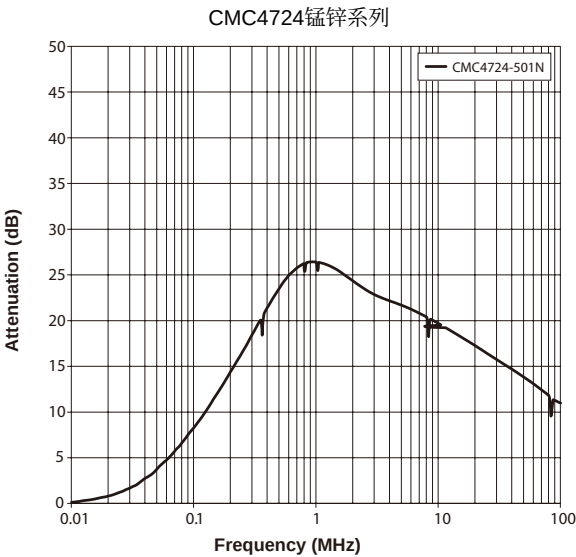

CMC Series

Common Mode Choke

Size 4724

CHARACTERISTICS


- 采用紧凑均匀的绕线工艺，有效减低寄生电容，提高线间耐压等级
- 标称额定电压250Vac; 线间绝缘测试电压1500Vac
- 工作温度范围：-55°C~+125°C

APPLICATION

- 电源线输入、输出共模噪声消减和浪涌抑制（250Vac）
- 电力电源装置的浪涌抑制和EMI滤波
- 浮地装置的滤波
- EMI对策用
- 特别适用于AC/DC转换，DC/AC逆变等线路的电磁干扰抑制

Dimensions: [mm]

Land Pattern: [mm]

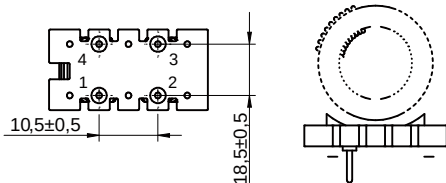

Schematic:

Electrical Properties:

Typical Electrical Characteristics:

Insertion Loss Common Mode

