

MDTA Series

Flat Wire Molded Inductor

Size 6060


FEATURES

- Flat wire coil for low copper losses
- / 0Ψμ0σ000\$ 000\$ Ψ00\$000P 0PP0Xσ 10° 1 σ0000000 000\$000\$
- 3\$000P0X 0000σ00 000\$ 00\$ 0\$000P0X P\$000\$ 0\$ 0\$ 000\$
- High current c00000000 00\$ 100\$0\$σ 10° 1 00000\$000 current spi0es
- AE/ v 000000\$
-
-


APPLICATION

-
-

Dimensions: [mm]

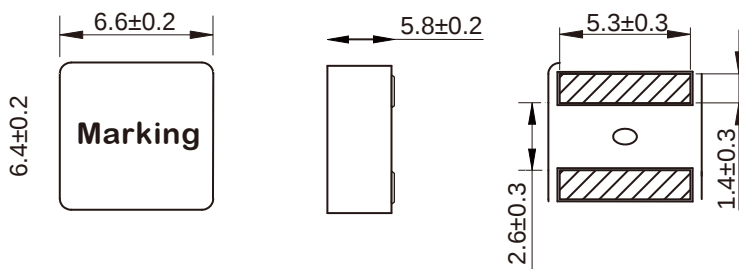


Land Pattern: [mm]



Electrical Properties:

Reel Dimension: [mm]

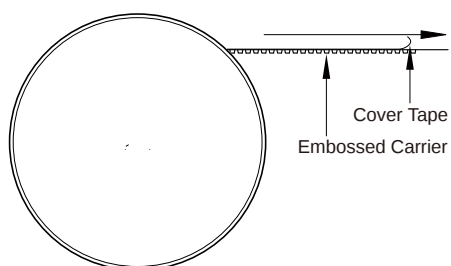

Packaging Quantity: