



Wire Wound Molded SMD Power Inductors Size 25201B




- {ύ~ σ{ύΐο{ΓύΩ
- ΙΩ°'Ι Όΐοο\$Ωύ ΡύΧ 5/w 'ΙΩ°'Ι \$ΥΌΩ\$ΩΌβι
- ³\$οβι ΡύΧ {ΌύΐσΓΌ ΩύΩσ\$ {Ω\$ Φ\$οβι ΡύΧ Ρ\${Ξ{°\$ \$ΐΐβ ΩύΩσ\$
- ΙΩ°'Ι ο\$ΡΩ{όΠΩύβι
- [ς{ś tō Co\$ς {Ω\$ wύ Ι { ΌύΨμΡΩ{Ωύ
- ημ\$ο{ΓΩ° ύ\$Ψμ\$ο{ύΐο\$ °C ΛΩΌΡΐ\$Ω° σ\$Ρύ ύ\$Ψμ\$ο{ύΐο\$ οΩσ\$
- νΐ{ΩΓύβι μΌσ

- bύύ\$ t / μύΧ\$ο σβ{σύ\$Ψ ΩΩΌΡ La ³ t
- 5/ 5/ ΌύΩΦ\$ού\$ο

Dimensions: [mm]

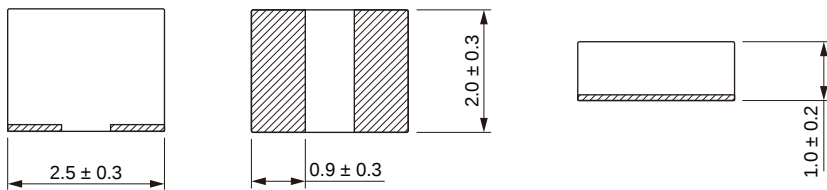

Land Pattern: [mm]




Part No	Inductance @ 1MHz/1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	Temperature Rise Current Max.	DC Resistance Max.

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

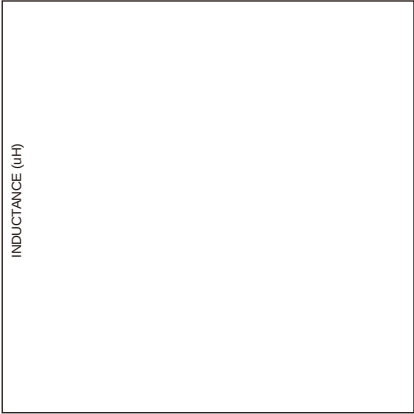

Soldering Reflow:



Packaging Information:


Tape Dimension:



Series	A0 (mm)	B0 (mm)
--------	------------	------------


MDTE25201B

Peel force of top cover tape:

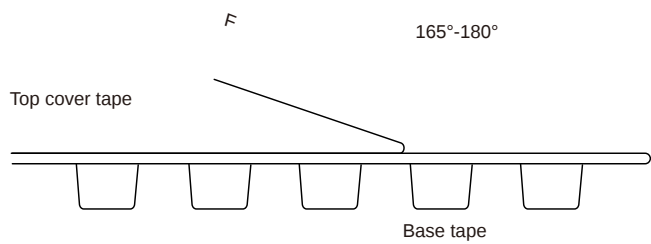

The peel force of top cover tape shall be betw os

Reel Dimension: [mm]

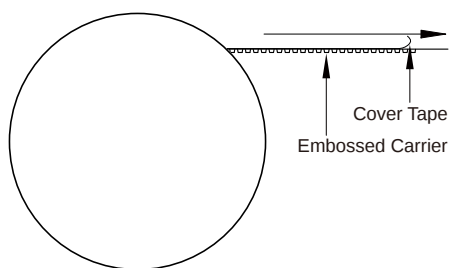

Packaging Quantity: