

## WWCI Series

SMD Wire Wound Ceramic Inductor  
Size 1008

### CHARACTERISTICS


- Wire wound with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quantity: 2000pcs

### APPLICATION

- HF application

Dimensions: [mm]

Land Pattern: [mm]

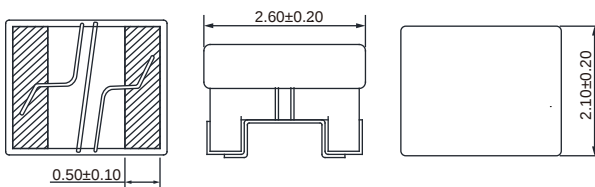


Electrical Properties:

Operating temperature: -40 to +125°C  
Temperature rise current: the actual value of DC current when the temperature rise is  $\Delta T15^{\circ}\text{C}$



# Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

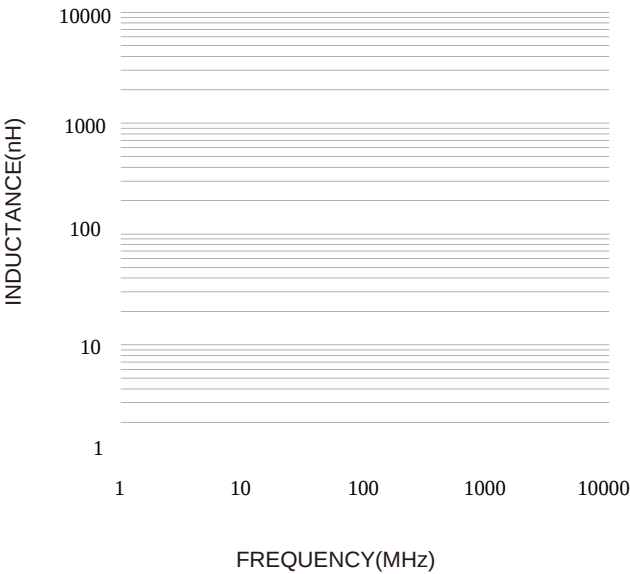

Temperture Rise VS. Frequency Characteristics:

